



DATA ACQUISITION SYSTEM PWBLOGG N7/180



Management
System
ISO 9001:2015

www.tuv.com
ID: 0091005312




PAULWEGENER
MESSTECHNIK SEIT 1921

TECHNICAL DATA SHEET PWBLOGG N7/180

Data acquisition system with up to 8 inputs

Housing	Aluminium - cast metal housing 180 x 140 x 70 mm (w x h x d)
Degree of protection	IP 65
Weight (inclusive batteries)	approx. 1600 g
Power supply	lithium battery 16.500 mAh optional mains supply
Running time	up to 5 years
Data memory / internal	512 kB (up to 507.000 readings) (optional up to 2 MB)
Data memory /external	SD card up to 2 GB (optional)
Storage interval	1s - 1h (arbitrary) ms optional
Storage mode	ring buffer or linear storage unit
Display	grafic display 128 x 64 pixels
Operation	7 keys (keypad) or PC
Real time clock	± 10 ppm at 25 °C
Explosion protection certification	(optional)
Ex zone 2	Ex II3G Ex ec nC [ic Gc] IIC T4 Gc X
increased security	EN 60079-0, 60079-7, 60079-11
Ex zone 1	Ex II2G Ex ib IIB T4 Gb
Intrinsically safe	EN 60079-0 and 60079-11
EC type-examination certificate	IBExU11ATEX1064
Transducers	
Temperature transducers	- 10 °C up to 40 °C / - 20 °C up to 60 °C
Pressure transducers	0...50 mbar up to 0...70 bar 0...40 up to 0...1000 bar
Accuracy	0,05% up to 1% of final value (further ones on request)
Impulses	open collector, reed, relais
Standard signals	0...20 mA, 4...20 mA, 0...1 V, 0...10V (further ones on request)

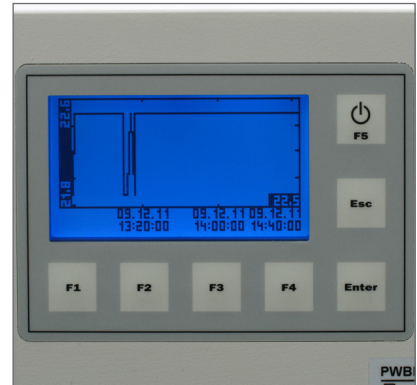

Händlerstempel



PAULWEGENER
MESSTECHNIK SEIT 1921

Adresse | Paul Wegener GmbH | Marienstraße 24 | 06493 Ballenstedt
 Telefon | +49 39483 96-300
 Fax | +49 39483 96-400
 Internet | www.paul-wegener.de
 E-Mail | info@paul-wegener.de