



DATA ACQUISITION SYSTEM PWBLOGG RLBK N7/PC1550/E



www.tuv.com
ID 009100312





PAULWEGENER
MESSTECHNIK SEIT 1921

TECHNICAL DATA SHEET RLBK N7/PC1550/E

Data acquisition system with up to 8 inputs

Carrying case / material	Peli 1550 (polypropylene)
Dimensions	52,4 x 42,8 x 20.6 cm (w x h x d)
Degree of protection	IP 67
Weight (inclusive rechargeable battery)	approx. 14 kg
Power supply	lithium ion battery 2.100 mAh (overcharge and depth discharge protection)
Running time	up to 1 month
Printer	built-in thermal printer (optional) (printout 110 x 295 mm)
Accessory compartment	30,3 x 19,5 x 12.2 cm (w x h x d)
Data logger	N7
Data memory / internal	512 kB (up to 507.000 readings) (optional up to 2 MB)
Data memory / external	SD card up to 4 GB (optional)
Storage interval	1s - 1h (arbitrary)
Storage mode	ring buffer or linear storage unit
Display	chart display 128 x 64 pixels
Operation	7 keys (keypad) or PC
Real time clock	± 10 ppm at 25 °C
Accessories	charging cable and evaluation software
Transducers	up to 4 flanged or 8 pluggable transducers
Temperature transducers	- 10 °C up to 40 °C / - 20 °C up to 60 °C
Pressure transducers	0...50 mbar up to 0...70 bar 0...40 bar up to 0...1000 bar
Accuracy	0,05% up to 1% of final value (further ones on request)
Impulses	open collector, reed, relais
Standard signals	0...20 mA, 4...20 mA, 0...1 V, 0...10 V (further ones on request)

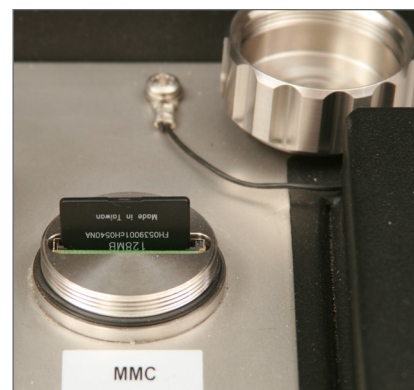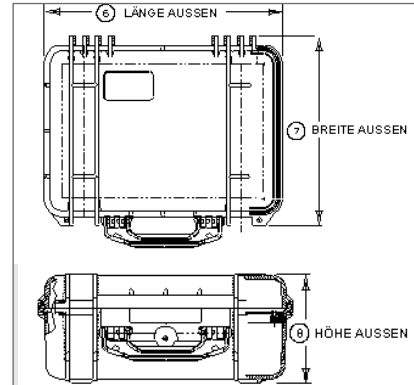

Händlerstempel



PAULWEGENER
MESSTECHNIK SEIT 1921

Adresse | Paul Wegener GmbH | Marienstraße 24 | 06493 Ballenstedt
 Telefon | +49 39483 96-300
 Fax | +49 39483 96-400
 Internet | www.paul-wegener.de
 E-Mail | info@paul-wegener.de